

POLYCAST®

DG0653D

800 Series




Ductile Iron Slotted

PROJECT ID/ CONTRACT NO: _____

LOCATION: _____

ENGINEERING SPECIFICATION:

POLYCAST® DG0653D DESIGNED FOR FREQUENT HEAVY TRAFFIC.

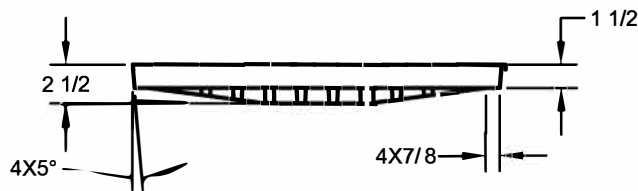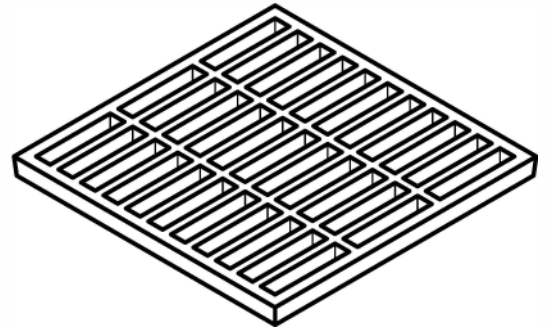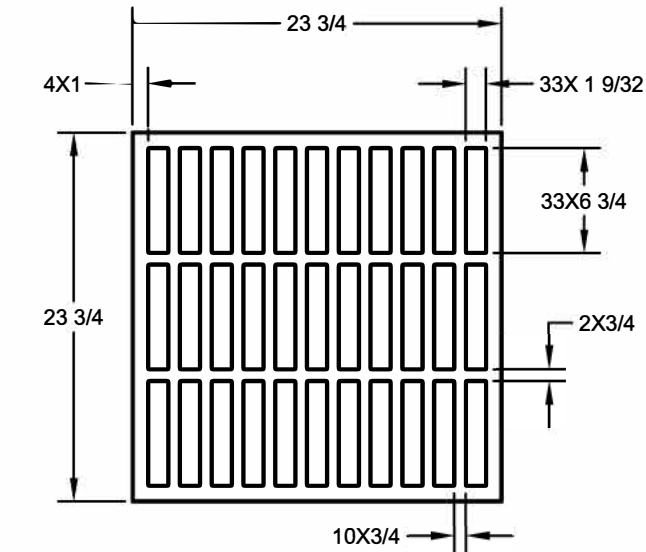

DIN APPLICATION LOAD CLASS F:

Industrial areas, forklifts, traffic, ports, and dock sides.

Designed for a distributed pressure of 134,800 lbs (600 kN).

Meets the following Standards & Specifications:

- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas



TDS

Fast Drainage
Quick Solutions



Trench Drain Systems is the largest stocking distributor
of Hubbell POLYCAST® in the US
trenchdrain.com • 610-638-1221